


# LED OBSTAFLASH

The led OBSTAFLASH medium intensity is a white, red or dual color flashing obstruction light.  
The OBSTAFLASH is compliant with ICAO medium intensity type A and B, FAA L864/L865 flashing lights.

## Flashhead

- 6 led projectors
- Aluminium and glass envelope
- Modular design
- Easy maintenance
- Precise optic

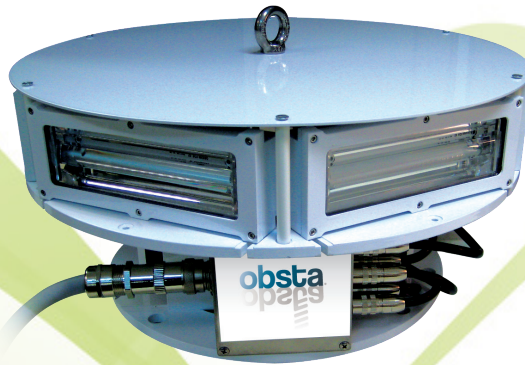

## Description

- 20 000 candelas during day time in white,
- 2000 candelas during the night red or white,
- Rugged design
- Easy installation

Patent : EP 1966535B1 & US 7816843



## Power cabinet

- Available in 48 Vdc or 120 /230 Vac
- Surge protection
- Alarm monitoring
- Automatic day/night switch with integrated photocell
- Security switch
- Luminous indicator
- Test button for day and night
- Modular design

## MAIN CHARACTERISTICS



| Main characteristics | Luminous output      |         | Color            |       | Beam Spread |            | Flashes per minute |
|----------------------|----------------------|---------|------------------|-------|-------------|------------|--------------------|
|                      | Day                  | Night   | Day              | Night | Vertical    | Horizontal |                    |
| Red only             | <del>20 000 Cd</del> | 2000 Cd | <del>White</del> | Red   | 3°          | 360°       | 40                 |
| White only           | 20 000 Cd            | 2000 Cd | White            | White |             |            |                    |
| Dual color           | 20 000 Cd            | 2000 Cd | White            | Red   |             |            |                    |

| OBSTA part number | Main characteristics | Power supply | Power consumption |
|-------------------|----------------------|--------------|-------------------|
| 13720             | White only           | 48 Vdc       | < 75 W            |
| 13721             | Red only             | 48 Vdc       | < 25 W            |
| 13722             | Dual color           | 48 Vdc       | < 75 W            |
| 13723             | White only           | 120/230 Vac  | < 75 W            |
| 13724             | Red only             | 120/230 Vac  | < 25 W            |
| 13725             | Dual color           | 120/230 Vac  | < 75 W            |

## ADDITIONAL FEATURES


### WEIGHT AND DIMENSIONS (in mm)

#### Flashhead

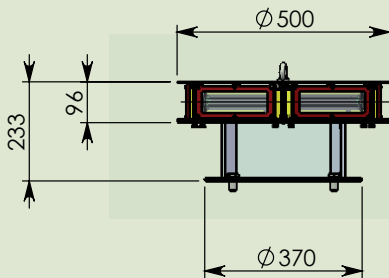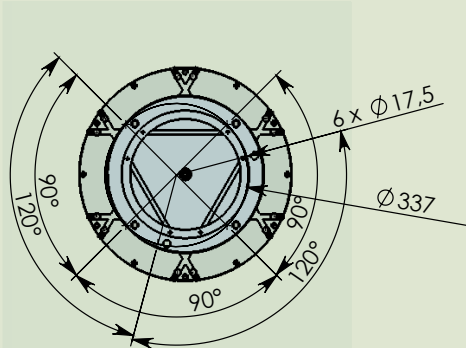

Weight: 18kg  
IP66 for each led projector

#### Control cabinet

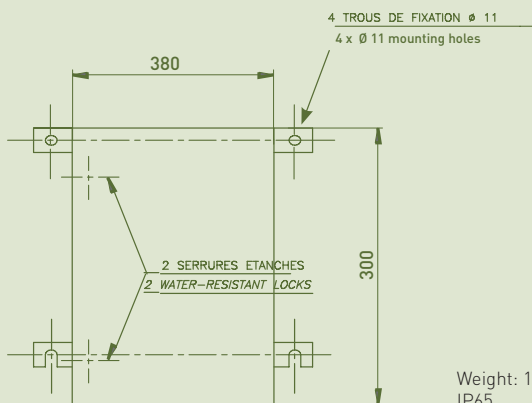

Weight: 10kg  
IP65

### SETS COMPOSITION

#### Obstruction lighting system Medium intensity kit

Flashhead  
Control cabinet  
Photocell

Connecting cable between  
flashhead and control cabinet

Other request: please contact us

Operating temperature : -30° up to +55° C

### OPTIONS

- Master/slave multiple beacon system, by cable or fiber optic for more than 4 lights
- GPS module for synchronization of the flashes and day/night switch
- Battery cabinet for 12 hours and 3 hours
- Available with «FEUER W» for night operation
- For red option, one control cabinet can power up to 6 lights