

MEDIUM VOLTAGE SURGE ARRESTER SPA SERIES - INDOOR

KEY FEATURES

- Maintenance free
- Superior TOV performance
- High energy handling capability
- Tested in accordance with IEC60099-4
- Superior protection margins
- Excellent cantilever and tensile performance
- Excellent mechanical, vibration and impact withstand capability

TE Connectivity's (TE) Raychem pioneered the development of the compact SPA arrester. It has high mechanical strength, is fully track resistant, and can provide flashover resistance in damp indoor conditions.

The SPA type arrester is also available with a thick-wall insulated integrated line lead, which allows for a considerable reduction in the clearances between the arresters and to the earth. This line lead is available in lengths of 250 mm, 500 mm and 750 mm.

This SPA-I type arrester is the ideal solution when retrofitting compact switchgears with arresters.

With over 40 years proven global core of the SPA arrester uses an improved ZnO varistor disk, which has superior thermal and electrical characteristics and stability.

TE's Raychem SPA surge arresters have been designed and tested to meet IEC60099-4 international standards. This new varistor and design combination results in superior energy handling and TOV performance. The wrapped structural construction offers a light weight product with high mechanical strength.

Applications for the SPA include protection of air-spaced insulated medium voltage switchgear networks and equipment from lightning and switching surge related over-voltages in areas with relatively high iso-keraunic levels.

Customers can count on consistent, high quality products, driven by TE's proven innovation and backed by our extraordinary customer support.

Medium Voltage Surge Arrester - SPA Series



High quality design and manufacturing.
ISO 9001 and 14001 compliant.

TABLE 1: TECHNICAL DATA

Rated discharge current (8/20 μ s)	10 kA
Line discharge class 1 according to	IEC 60099-4, class 1
Operating duty impulse withstand current (4/10 μ s)	100 kA
Long duration current impulse (2000 μ s)	400 A
10 second TOV, (U_{TOV}/U_c)	1,3
High current short circuit: (pre-failing method) (Safe non-shattering failure mode)	16 kA
Energy	line discharge impulse high current impulse
	2.0 kJ/kV U_c 3.2 kJ/kV U_c
Cantilever	200 Nm
Tensile	1000 N
Torque	58 Nm

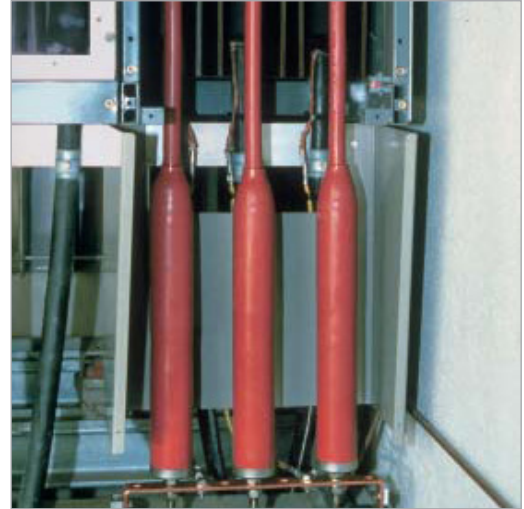


TABLE 2: PRODUCT SELECTION INFORMATION

Description	Height (mm)	U_c kV	U_r kV	Residual Voltage - kV (Using IEC Standard Impulses)				
				Lighting - [8/20 μ s]			Steep Lighting - [1/20 μ s]	Switching - [30/60 μ s]
				at 10 kA	at 20 kA	at 40 kA	at 10 kA	at 500 A
SPA-06	137,5	6	7,5	19,9	21,9	24,9	21,3	15,6
SPA-09	166,5	9	11,25	29,9	32,8	37,4	32,0	23,4
SPA-12	198,5	12	15	39,8	43,7	49,9	42,7	31,2
SPA-15	299,5	15	18,75	49,8	54,6	62,4	53,4	39,0
SPA-18	329,5	18	22,5	59,8	65,5	74,9	64,1	46,8
SPA-21	359,5	21	26,25	69,7	76,4	87,4	74,8	54,6
SPA-24	392,5	24	30	79,7	87,4	99,8	85,4	62,4
SPA-30	520,5	30	37,5	99,6	109,2	124,8	106,8	78,0
SPA-33	619	33	41,25	109,6	120,1	137,3	117,5	85,8
SPA-36	581	36	45	119,5	131,0	149,8	128,2	93,6
SPA-40	591	40	50	132,8	145,6	166,4	142,4	104,0

U_c = Continuous operating voltage

U_r = Rated voltage

ORDERING INFORMATION

For accessory range and ordering information please refer to brochure EPP-2131 or e-mail us at surgearresters@te.com.

Example of a complete part description: SPA-12

te.com/energy

©2014 TE Connectivity Ltd. family of companies. All Rights Reserved. EPP-2337-10/14

TE Connectivity and TE connectivity (logo) are trademarks. Other logos, product and/or company names might be trademarks of their respective owners. While TE has made every reasonable effort to ensure the accuracy of the information in this brochure, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalog are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

FOR MORE INFORMATION: TE Technical Support Centers

USA:	+1 (800) 327-6996
France:	+33 3 80 58 3200
UK:	+44 0870-8707500
Germany:	+49 (0) 89 60 89 903
Spain:	+34 916 630 420
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Benelux:	+ 32 16 351 731
China:	+86 (0) 400-820-6015
Ireland:	+353 61 470 800